



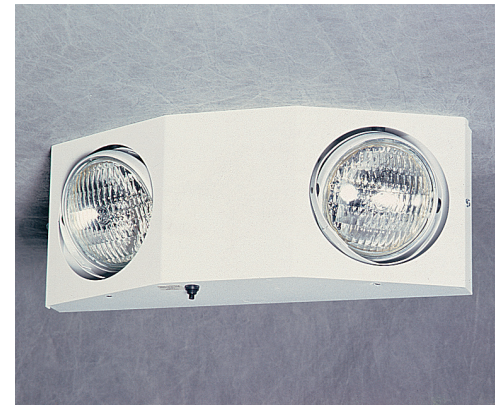


**SERIES FEATURES**

	<ul style="list-style-type: none"> <li>▶ INTEGRATED SOLID STATE SYSTEM</li> <li>▶ MULTI-RATE, CONTROLLED, AUTOMATIC CHARGER</li> <li>▶ LOCK OUT (AUTOMATIC BATTERY CONNECT)</li> <li>▶ LOW VOLTAGE BATTERY CUTOFF</li> <li>▶ BROWNOUT SENSITIVITY</li> <li>▶ DUAL VOLTAGE TRANSFORMER FOR 120/277 VAC OPERATION</li> <li>▶ MAXIMUM INPUT RATING 120VAC 60 Hz 0.05 AMPS 277VAC 60 Hz 0.02 AMPS</li> </ul>
	<ul style="list-style-type: none"> <li>▶ HIT LAMPS</li> <li>▶ PAR-36 SEALED BEAM LAMPS</li> </ul>
	<p style="text-align: center;">S L T A M P</p> <p>▶ SEE UNIT INFORMATION</p>
	<ul style="list-style-type: none"> <li>▶ SEALED LEAD ACID BATTERY</li> <li>▶ 6 VOLT OPERATION</li> <li>▶ MAINTENANCE FREE</li> </ul>
	<ul style="list-style-type: none"> <li>▶ CONTEMPORARY BEVEL DESIGN</li> <li>▶ 20 GAUGE STEEL HOUSING</li> <li>▶ FULLY RECESSED LAMP ENCLOSURES</li> <li>▶ BI-AXIAL LAMP ROTATION</li> <li>▶ UNIVERSAL MOUNT BACKPLATE</li> <li>▶ WHITE POWDER COAT FINISH</li> <li>▶ TEST SWITCH</li> <li>▶ RED (POWER ON) &amp; GREEN (TRICKLE CHARGE) LED INDICATORS</li> <li>▶ UL LISTED</li> <li>▶ NEW YORK CITY APPROVED/CALENDAR #38236</li> </ul>



THE EM10 SERIES OFFERS A HIGH END LOOK FOR LOW BUDGET DOLLARS. DESIGNED TO MEET DEMANDING ARCHITECTURAL REQUIREMENTS, THE ATTRACTIVE BEVEL DESIGN AND RECESSED LAMP HEADS COMPLEMENT COMMERCIAL ENVIRONMENTS.

**DIMENSIONS**

HEIGHT: 6.5"  
WIDTH: 16.0"  
DEPTH: 4.5

**UNIT INFORMATION**

MODEL NUMBER	STD. LAMP WATT	WATTS PER HOUR								REPLACEMENT BATTERY
		1.5	2	3	4	5	6	7	8	
EM10	8	18	14	9	7	~	~	~	~	[1] S68
EM10A	8	32	24	16	12	10	8	7	6	[1] S610-SL
EM10B †	12	32	24	16	12	10	8	7	6	[1] S610-SL

† CHICAGO CODE APPROVED

ILLUMINATION IS RATED TO 87.5% OF NOMINAL SYSTEM VOLTAGE AND RECHARGE TO FULL CAPACITY WITHIN 24 HOURS.

NEC REQUIRES 1.5 HOURS OF EMERGENCY ILLUMINATION.

**FACTORY OPTIONS**

-\*\* SPECIAL LAMP WATTAGE

