




SERIES FEATURES

	<ul style="list-style-type: none"> ▶ INTEGRATED SOLID STATE SYSTEM ▶ MULTI-RATE, CONTROLLED, AUTOMATIC CHARGER ▶ LOCK OUT (AUTOMATIC BATTERY CONNECT) ▶ LOW VOLTAGE BATTERY CUTOFF ▶ BROWNOUT SENSITIVITY ▶ DUAL VOLTAGE TRANSFORMER FOR 120/277 VAC OPERATION ▶ MAXIMUM INPUT RATING 120VAC 60 Hz 0.35 AMPS 277VAC 60 Hz 0.15 AMPS
	<ul style="list-style-type: none"> ▶ HIT LAMPS S L T A D P ▶ SEE UNIT INFORMATION ▶ PAR-36 SEALED BEAMS
	<ul style="list-style-type: none"> ▶ SEALED LEAD ACID BATTERY/SEALED NI-CAD ▶ 6 VOLT OPERATION ▶ MAINTENANCE FREE
	<ul style="list-style-type: none"> ▶ FULLY RECESSED STYLING ▶ STEEL LAMP HEADS (ROUND) ▶ 20 GAUGE STEEL HOUSING ▶ POLYCARBONATE LAMP HEADS (RECTANGULAR) ▶ INCLUDES [4] ADJUSTABLE MTG. TABS ▶ WHITE POWDER COAT FINISH ▶ TEST SWITCH ▶ LED POWER ON (CHARGE) INDICATOR ▶ UL LISTED

RECTANGULAR HEADS
SUFFIX "-PH"




SHOWN IN
STANDARD
WHITE FINISH

ROUND HEADS
SUFFIX "-R"



SHOWN IN
STANDARD
WHITE FINISH

THE EM SERIES IS IDEAL FOR INSTALLATIONS REQUIRING THE AESTHETIC ADVANTAGE OF A FULLY RECESSED EMERGENCY UNIT.

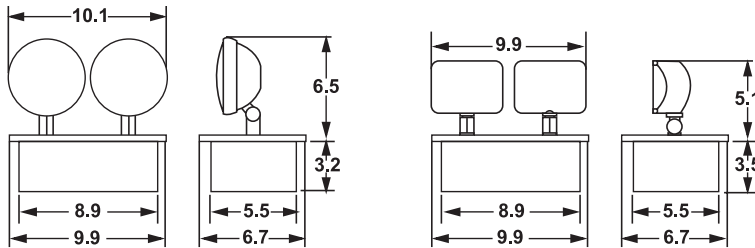

DIMENSIONS

ROUGH-IN
OPENING SIZE
9" x 5 5/8"

UNIT INFORMATION

MODEL NUMBER	STD. LAMP WATT	WATTS PER HOUR				REPLACEMENT BATTERY	HEAD SHAPE
		1.5	2	3	4		
EM63-R	6	12	9	6	~	[1] S65	ROUND
EM63-PH	6	12	9	6	~	[1] S65	RECTANGULAR
EM64-R	9	18	14	9	7	[1] S68	ROUND
EM64-PH	9	18	14	9	7	[1] S68	RECTANGULAR
EM65-R	9	32	24	16	12	[1] S610-SL	ROUND
EM65-PH	9	32	24	16	12	[1] S610-SL	RECTANGULAR
EM65-H †	12	32	24	16	12	[1] S610-SL	ROUND

EM63-R-N4	6	12	9	6	~	[1] N64F	ROUND
EM63-PH-N4	6	12	9	6	~	[1] N64F	RECTANGULAR
EM65-H-N7	12	25	18	14	9	[1] N67F	ROUND

† CHICAGO CODE APPROVED

ILLUMINATION IS RATED TO **87.5%** OF NOMINAL SYSTEM VOLTAGE AND RECHARGE TO FULL CAPACITY WITHIN 24 HOURS.

NEC REQUIRES 1.5 HOURS OF EMERGENCY ILLUMINATION.

FACTORY OPTIONS

- BG** BEIGE FINISH
- OW** DESIGNER OFFWHITE FINISH
- BLK** BLACK FINISH
- PA** PLENUM CONSTRUCTION
- **** SPECIAL LAMP WATTAGE

