








SERIES FEATURES

	<ul style="list-style-type: none"> ▶ 120 VAC OPERATION STD. ▶ MAXIMUM INPUT RATING (120 OR 277 VAC) 1.7 WATTS
	<ul style="list-style-type: none"> ▶ LIGHT EMITTING DIODES ~ 25+ YEAR LIFE ▶ ILLUMINATES WITH UNIFORM COLOR AND BRIGHTNESS
	<ul style="list-style-type: none"> ▶ ARCHITECTURAL GRADE ▶ CLEAN, CONTEMPORARY STYLING ▶ CEILING OR WALL MOUNT ▶ RECESSED OR SURFACE HOUSING ▶ RECESSED INCLUDES [4] ADJUSTABLE MTG. TABS ▶ ETCHED, CLEAR ACRYLIC, EDGE-LIT PANEL ▶ SILK SCREENED LETTERS ▶ STEEL HOUSING AND TRIM PLATE ▶ WHITE POWDER COAT FINISH ▶ UL LISTED



RECESSED SIGNS
ROUGH-IN
OPENING SIZE
2.75" x 15.38"

ADDITIONAL EMERGENCY UNIT FEATURES

	<ul style="list-style-type: none"> ▶ DUAL VOLTAGE TRANSFORMER FOR 120/277 VAC OPERATION ▶ INTEGRATED SOLID STATE SYSTEM ▶ CONSTANT CURRENT, AUTOMATIC CHARGER ▶ LOCK OUT (AUTOMATIC BATTERY CONNECT) ▶ LOW VOLTAGE BATTERY CUTOFF ▶ BROWNOUT SENSITIVITY ▶ MAXIMUM INPUT RATING (120 OR 277 VAC) 1.7 WATTS
	<ul style="list-style-type: none"> ▶ LIGHT EMITTING DIODES ▶ INITIAL INCREASED LED BRIGHTNESS LEVEL IN EMERGENCY MODE
	<ul style="list-style-type: none"> ▶ SEALED NICKEL CADMIUM BATTERY ▶ 10 YEAR BATTERY WARRANTY ▶ MAINTENANCE FREE
	<ul style="list-style-type: none"> ▶ 3+ HOURS ILLUMINATION IN EMERGENCY MODE ▶ TEST SWITCH ▶ AMBER (POWER ON) INDICATOR

FACTORY OPTIONS

- PA** PLENUM CONSTRUCTION
- 2C** (2)INDEPENDENT AC CIRCUITS
- E** END MOUNT
- UNMTG** UNIVERSAL MOUNTING BRACKET

SPECIFY ARROW CONFIGURATION ON ALL EDGE LIT SIGNS:

BLANK = NO CHEVRON	
CR = CHEVRON RIGHT	>
CL = CHEVRON LEFT	<
CD = DUAL CHEVRON	<>
CRCL = CHEVRON RIGHT	① >
CHEVRON LEFT	< ②
(DOUBLE FACE ONLY)	

↔ DBL. FACE ONLY. 1 ARROW PER FACE







* STANDARD

ORDERING INFORMATION

GXL SERIES GXLA ~ AC GXLS ~ EMER.	1 # FACES 1 2	W TRIM COLOR W HITE * BR ASS M ATTE CHROME B LACK	R LETTER COLOR R ED G REEN	W[†] BKGRND. COLOR BLANK ~ NONE W ~ WHITE MB ~ MIRRORRED	C FIXTURE TYPE C EILING W ALL	R MOUNTING TYPE R ECESSED S URFACE	-PA OPTIONS FACTORY OPTIONS
---	-------------------------------	---	--	--	---	--	---

† STD. BACKGROUND COLOR OF SGL FACE SIGN IS CLEAR (BLANK). FOR NON-STD. SINGLE & ALL DOUBLE FACE SIGNS. INDICATE W FOR WHITE BACKGROUND OR MB FOR MIRRORRED BACKGROUND

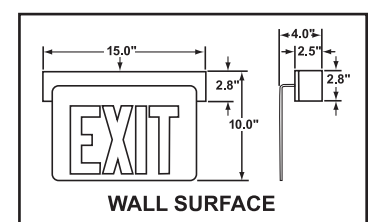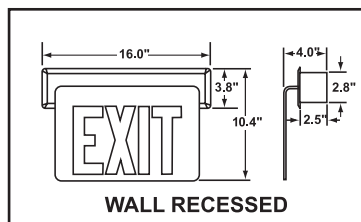

PHONE 815-459-7142 • FAX 815-459-6126

THE POWER TO PROTECT