

SQE6 SERIES FEATURES

- ▶ INTEGRATED SOLID STATE SYSTEM
- ▶ MULTI-RATE, CONTROLLED, AUTOMATIC CHARGER
- ▶ LOCK OUT (AUTOMATIC BATTERY CONNECT)
- ▶ LOW VOLTAGE BATTERY CUTOFF
- ▶ BROWNOUT SENSITIVITY
- ▶ DUAL VOLTAGE TRANSFORMER FOR 120/277 VAC OPERATION
- ▶ MAXIMUM INPUT RATING
120VAC 60 Hz 0.30 AMPS
277VAC 60 Hz 0.13 AMPS

SLAMP ▶ 6 VOLT ~ 6 WATT

- ▶ SEALED LEAD ACID BATTERY
- ▶ 6 VOLT OPERATION
- ▶ MAINTENANCE FREE

- ▶ SURFACE MOUNT
- ▶ THERMOPLASTIC HOUSING
- ▶ PRISMATIC DIFFUSER
- ▶ MATTE WHITE FINISH
- ▶ RED (POWER ON) INDICATOR
- ▶ TEST SWITCH



DIMENSIONS
 HEIGHT: 9.00"
 WIDTH: 9.00"
 DEPTH: 4.00"

FACTORY OPTIONS
-SR SEMI-RECESSING KIT

UNIT INFORMATION

MODEL NUMBER	STD. LAMP WATT	WATTS PER HOUR								REPLACEMENT BATTERY
		1.5	2	3	4	5	6	7	8	
SQE65	6	12	9	6	~	~	~	~	~	[1] S65
SQE610	6	32	24	16	~	~	~	~	~	[2] S65
SQE6R	6	~	~	~	~	~	~	~	~	REMOTE
SQE610-FR	6	~	~	~	~	~	~	~	~	FULLY RECESSED




ELF SERIES FEATURES

- ▶ DIFFUSED GLARE FREE LIGHT
- ▶ ENERGY SAVING FLUORESCENT LAMPS
- ▶ SOLID STATE CHARGER ON EMERGENCY UNITS
- ▶ SEALED NICKEL CADMIUM BATTERY
- ▶ 1.5 HOUR ILLUMINATION
- ▶ TEST SWITCH WITH INDICATOR LIGHT

FACTORY OPTIONS

FACTORY OPTIONS

- HPF** HIGH POWER FACTOR
- BR** BROWN
- BL** BLACK
- R** RECESSED

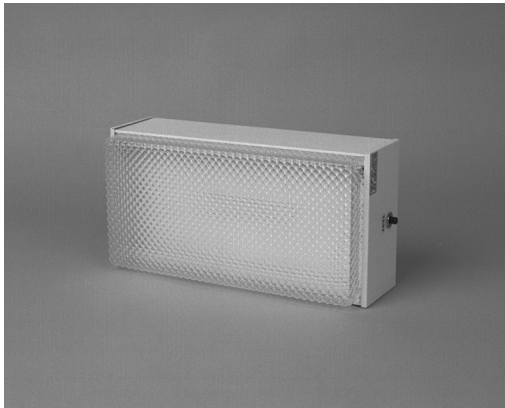

DIMENSIONS
 HEIGHT: 5.25"
 WIDTH: 10.375"
 DEPTH: 4.00"

ORDERING INFORMATION

DESCRIPTION	LAMP	VOLTAGE	OPERATION	OPER TIME
ELF-13	1-PL13	120/277	AC ONLY	
ELF-13-EM	1-PL13	120 OR 277	NORM ON	90 MIN.



PHONE 815-459-7142 • FAX 815-459-6126

THE POWER TO PROTECT