



SHOWN  
IN STANDARD  
WHITE FINISH

PROVIDING A CLEAN LOOK IN COMMERCIAL INSTALLATIONS, THE STB SERIES COMBINES THE ADVANTAGE OF A FULLY RECESSED UNIT WITH MAXIMUM REMOTE HEAD CAPABILITY.


### FACTORY OPTIONS

- OW** DESIGNER OFFWHITE FINISH
- BLK** BLACK FINISH
- PA** PLENUM CONSTRUCTION
- TD** TIME DELAY ADJUSTS 1-60 MIN.
- \*\*** SPECIAL LAMP WATTAGE
- QC** QUIK CHEK REMOTE TEST & TIME DELAY



### SERIES FEATURES

	▶ INTEGRATED SOLID STATE SYSTEM	
	▶ MULTI-RATE, CONTROLLED, AUTOMATIC CHARGER	
	▶ LOCK OUT (AUTOMATIC BATTERY CONNECT)	
	▶ LOW VOLTAGE BATTERY CUTOFF	
	▶ BROWNOUT SENSITIVITY	
	▶ FUSED AC INPUT & DC OUTPUT CIRCUIT PROTECTION	
	▶ DUAL VOLTAGE TRANSFORMER FOR 120/277 VAC OPERATION	
	▶ MAXIMUM INPUT RATING 120VAC 60 Hz 0.35 AMPS 277VAC 60 Hz 0.15 AMPS	
		▶ HIT LAMPS
		▶ PAR-36 SEALED BEAM LAMPS
		▶ 6 VOLT ~ 8 WATT ▶ 12 VOLT ~ 12 WATT
		▶ SEALED LEAD ACID BATTERY
▶ 6 OR 12 VOLT OPERATION		
▶ MAINTENANCE FREE		
	▶ FULLY RECESSED STYLING	
	▶ DESIGNED FOR USE IN 2 FT. GRID (T-BAR) DROP CEILINGS	
	▶ EASY ACCESS BATTERY PANELS	
	▶ 20 GAUGE STEEL HOUSING	
	▶ UNIT MOUNTS UP TO 4 LAMP HEADS	
	▶ WHITE POWDER COAT FINISH	
	▶ TEST SWITCH	
	▶ RED (POWER ON) LED INDICATORS	
	▶ UL LISTED	
▶ NEW YORK CITY APPROVED/CALENDAR #38236		

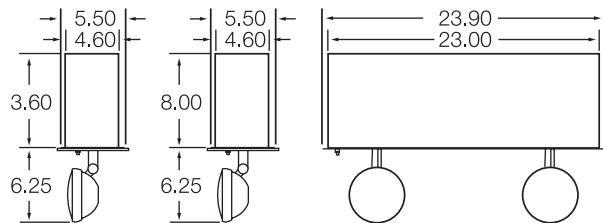

### UNIT INFORMATION

MODEL NUMBER	STD. LAMP WATT	WATTS PER HOUR								REPLACEMENT BATTERY
		1.5	2	3	4	5	6	7	8	
<b>STB18-6</b>	8	18	14	9	7	-	-	-	-	[1] S68
<b>STB32-6 †</b>	12	32	24	16	12	10	8	7	6	[1] S610-SL
<b>STB45-6</b>	8	45	36	20	15	12	10	9	8	[2] S68
<b>STB64-6</b>	8	64	50	32	24	19	16	14	12	[2] S610-SL
<b>STB100-6</b>	8	100	75	50	38	30	25	21	18	[1] S636
<b>STB36-12 †</b>	12	36	27	18	14	11	9	8	7	[2] S68
<b>STB60-12 †</b>	12	60	45	36	23	18	15	13	11	[2] S610-SL
<b>STB100-12 †</b>	12	100	75	50	38	30	25	21	18	[1] S1215

† CHICAGO CODE APPROVED

ILLUMINATION IS RATED TO **87.5%** OF NOMINAL SYSTEM VOLTAGE AND RECHARGE TO FULL CAPACITY WITHIN 24 HOURS.

NEC REQUIRES 1.5 HOURS OF EMERGENCY ILLUMINATION.